

Specification:

Frequency :890~960/1710~1880MHZ

Gain : 2dBi

Vswr : 2.0 Max.

Impedance :50 Ω

Polarization : Vertical

Radiation : OMNIDIRECTIONAL

Max power :50W

Shell material : PVC

Size: $\phi 29.5 \times 109$ mm

Connector :SMA or Other


Cable: RG174, Black

Length:3000mm or Other

Lightning protection: DC Grounding

Operating Temperature : -30°C to + 70°C

Order Information

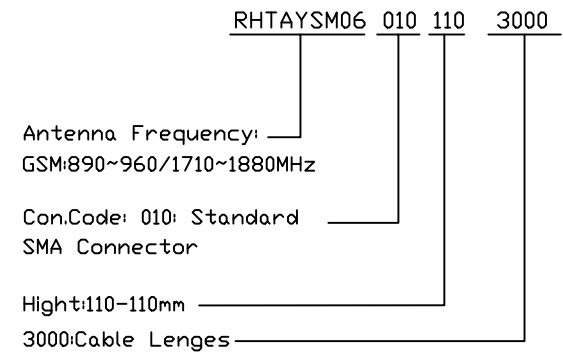

G	NINGBO RHT ELECTRONIC CO.,LTD	UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	GSM Antenna with Magnet			
		0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION	RHTAYSM06010XXXX	
		±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN			
1	2	3	4	5	6	7	8	9	