


PCB LAYOUT BOTTOM VIEW

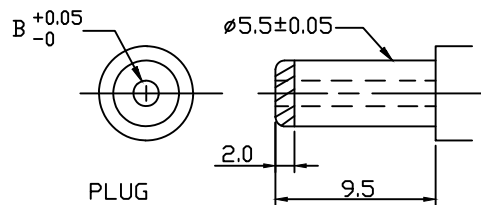


PLUG

SPECIFICATION

Rated Load:DC 30V 1.0A
 Contact Resistance:30mΩ, Max
 Insulation Resistance:100MΩ, Min
 Withstand Voltage:AC500V
 Actuating Force:3-20N
 Life:5000 Cycles
 Operating Temperature:-30°C-70°C

NO	Description	QTY	Material	Plating
1	Terminal	1	Brass	---
2	TIP Shunt	1	Brass	Sn-Plating
3	TIP	1	PBS	Sn-Plating
4	PIN	1	Brass	Ni-Plating
5	Housing	1	PBT 94V-0 G15	Sn-Plating
6	Cover	1	Phenolic Board	---

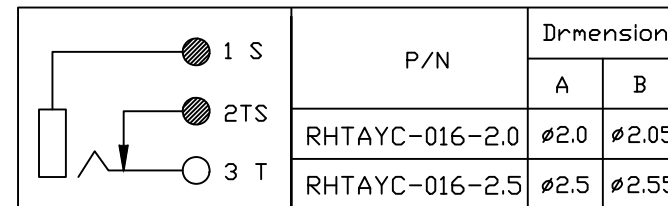

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	

DC POWER Jack DIP
 THIRD ANGLE PROJECTION
 RHTAYC-016