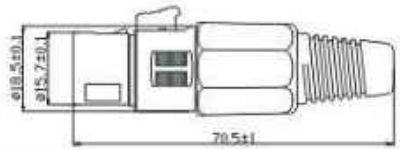

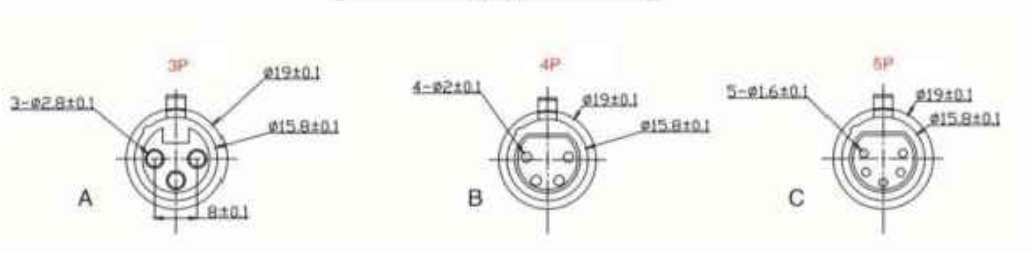

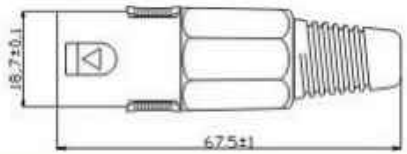

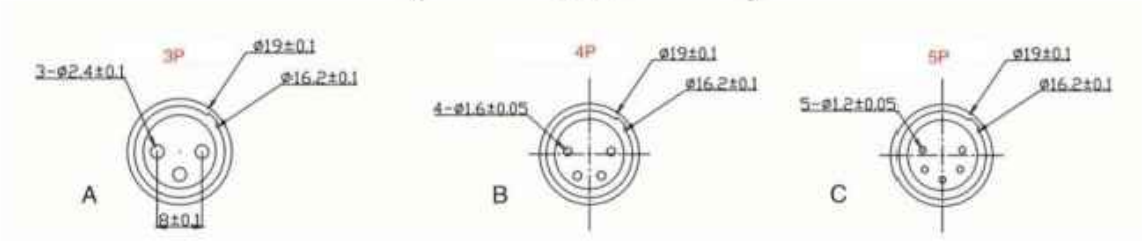

Electrical Specification:

Number Of Contacts: 3

Contact Resistance: ≤3 mOhms

Insulation Resistance Initial: >2 GOhms

After Damp Heat Test: > 1 GOhms

Dielectric Strength: 1500 V dc

Rated Current: 16 A

Mechanical Lifetime: >1000 Cycles

Insertion/Withdrawal Force: ≤20N

Cable O.D. Range: 4.0mm-8.0mm

Temperature Range: -30°C to+80°C

Order Information:

RHTAYLR-P04-03-F-B

XLR Jack Series.

03=3PIN of 03~07PIN

F=Female M=Male

R=Red B=Black W=White

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD	UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	XLR Plug		
	0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION	RHTAYLR-P04
	±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN		