


Electrical Specification:  
 Number of Contacts: 3  
 Contact Resistance: ≤3 mΩhms  
 Insulation Resistance Initial: >2 GΩhms  
 After Damp Heat Test: > 1 GΩhms  
 Dielectric Strength: 1500 V dc  
 Rated Current: 16 A  
 Mechanical Lifetime: >1000 Cycles  
 Insertion/Withdrawal Force: ≤20N  
 Cable O.D. Range: 4.0mm-8.0mm  
 Temperature Range: -30°C to+80°C

Order Information:  
**RHTAYLR-P09-03-F-B**

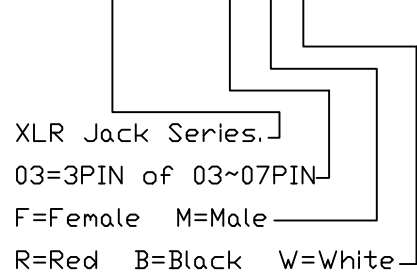


XLR Jack Series.  
 03=3PIN of 03~07PIN  
 F=Female M=Male  
 R=Red B=Black W=White

**RHTECP** NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
±0.12	±0.15	±0.3	±0.5	

DRWN BY PAN  
 CHK'D BY FENG  
 APPR BY ZHAN

XLR Plug  
 THIRD ANGLE PROJECTION  
 RHTAYLR-P09

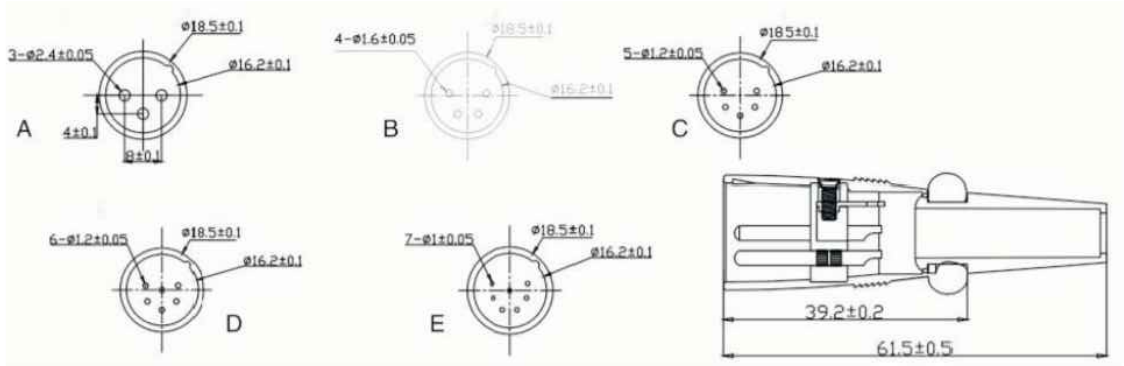

Electrical Specification:  
 Number Of Contacts: 3  
 Contact Resistance:  $\leq 3$  m $\Omega$ hms  
 Insulation Resistance Initial:  $> 2$  G $\Omega$ hms  
 After Damp Heat Test:  $> 1$  G $\Omega$ hms  
 Dielectric Strength: 1500 V dc  
 Rated Current: 16 A  
 Mechanical Lifetime:  $> 1000$  Cycles  
 Insertion/Withdrawal Force:  $\leq 20$ N  
 Cable O.D. Range: 4.0mm-8.0mm  
 Temperature Range: -30°C to+80°C

Order Information:  
 RHTAYLR-P09-03-M-B  
 XLR Jack Series.  
 03=3PIN of 03~07PIN  
 F=Female M=Male  
 R=Red B=Black W=White



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---
0~3	3~18	18~50	50~120	
$\pm 0.12$	$\pm 0.15$	$\pm 0.3$	$\pm 0.5$	

DRWN BY PAN  
 CHK'D BY FENG  
 APPR BY ZHAN

XLR Plug

THIRD ANGLE PROJECTION

RHTAYLR-P09