


Material  
 Base:DAP,UL94-V0  
 Terminals&Contact:Copper  
 Shell:Stainless Steel  
 Actuator:PA66  
 Electrical:  
 Contact Resistance:10mΩ Max  
 Insulation Resistance:1000mΩ Min  
 Dielectric Withstand:No  
 Discharge,Flashoveror Breakdown  
 At 1500VAC 1 Minute  
 Mechanical Life:30000 Cycles  
 Operation Temperature:-30°C To+85°C

Model No	Switching Position		
RHTGYS01-12E06A	On	None	Off
RHTGYS01-12E06	(On)	None	Off
RHTGYS01-12E06B	On	Off	On
Term Comm	2-3	Open	2-1
Schematic			

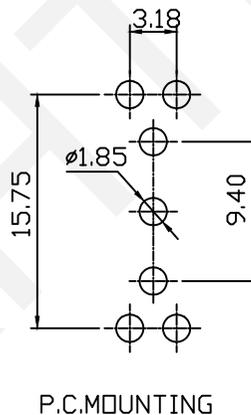

Actuator Color	
1	White
2	Black
3	Gray


Contact Material	
Q	Silver Plated
R	Gold Plated
G	Gold Over Silver



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN



Slide Switches

RHTGYS01-12E06A-G-4.7